


**TORX - Zylinderschrauben
 ISO 14579**

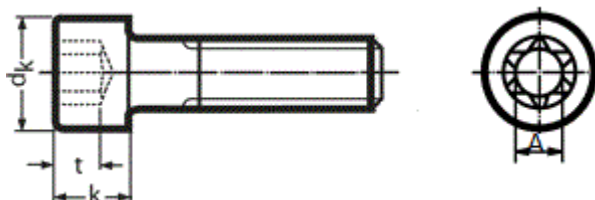

	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10
dk max.	3,80	4,50	5,50	7,00	8,50	10,00	13,00	16,00
k max.	2,00	2,50	3,00	4,00	5,00	6,00	8,00	10,00
Torx Nr.	6	8	10	20	25	30	45	50
A	1,75	2,40	2,80	3,95	4,50	5,60	7,95	8,95
t max.	0,84	1,04	1,27	1,80	2,03	2,42	3,31	4,02