


**TORX - Flachkopfschrauben
 ISO 14583**

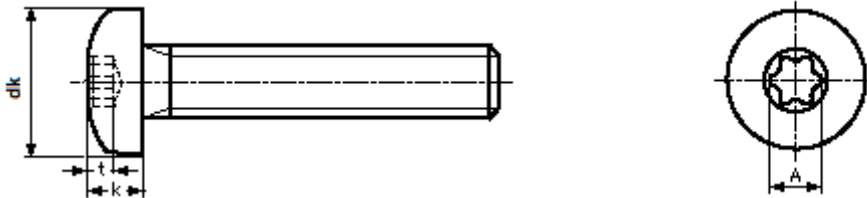

	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10
dk max.	4,0	5,0	5,6	8,00	9,50	12,00	16,00	20,00
k max.	1,60	2,10	2,40	3,10	3,70	4,60	6,00	7,50
Torx Nr.	6	8	10	20	25	30	45	50
A	1,75	2,40	2,80	3,95	4,50	5,60	7,95	8,95
t max.	0,77	1,04	1,27	1,66	1,91	2,42	3,18	4,02

Richtwerte für reduzierte Anziehdrehmomente MA max. (Nm)

M 2	M 3	M 4	M 5	M 6	M 8	M 10
0,32	0,6	1,3	2,6	4,5	11	21