


SH / Slim Head Screw TORX
A2 / Stahl vernickelt

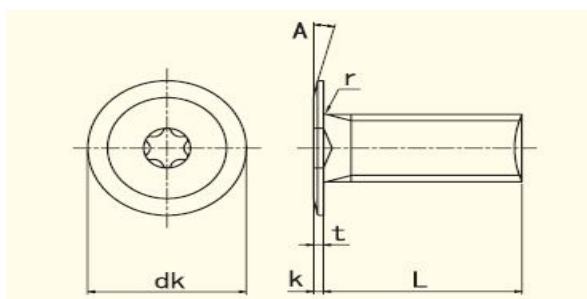

	M 2	M 2,6	M 3	M 4	M 5	M 6
dk	4	6	7	8	9	12
K	0,5	0,6	0,8	0,9	1,0	1,2
t (min)	0,4	0,5	0,75	0,9	1,0	1,2
Drive	T4	T5	T6	T8	T10	T20
A	Approx30°	Approx30°	Approx30°	Approx30°	Approx30°	Approx30°
MinFailure Torque	0,4 Nm	0,5 Nm	0,95 Nm	2,3 Nm	4 Nm	10 Nm